GETO Group

Headquarters:

Greater Bay Area—No. 13 Heqing Road, Tsuihang New District, Zhongshan City, Guangdong Province

Southern China Production Base I:

Cuishan Lake Science and Technology Park, Kaiping, Jiangmen City, Guangdong Province

Southern China Production Base II:

Huizhou Industrial Transfer Industrial Park, Huizhou City, Guangdong Province

Eastern China Production Base I:

Guangchang Industrial Park, Fuzhou City, Jiangxi Province

Central China Production Base:

Hi-tech Industry Development Zone, Xianning City, Hubei Province

Northern China Production Base:

China Aluminium Industrial Park, Linqu, Weifang City, Shandong Province

Southwest China Production Base:

Modern Manufacturing Industrial Park, Tongnan High-Tech District, Chongqing City

Northwest China Production Base:

The Circular Economy Park, Anding District, Dingxi City, Gansu Province

Hainan Production Base:

Gold Medal Port Industrial Park, Lingao County, Hainan Province

ASEAN Production Base:

Negeri Sembilan, Malaysia

Singapore Production Base:

West Region, Singapore

Saudi Arabia Production Base:

Riyadh, Saudi Arabia

Sales Hotline: 0086-760-88589004 E-mail: geto_market@geto.com.cn




Chinese Listed Company Stock Code: SZ 300986



Infrastructure Solutions 基建解决方案

One-Stop Solutions Provider 一站式解决方案

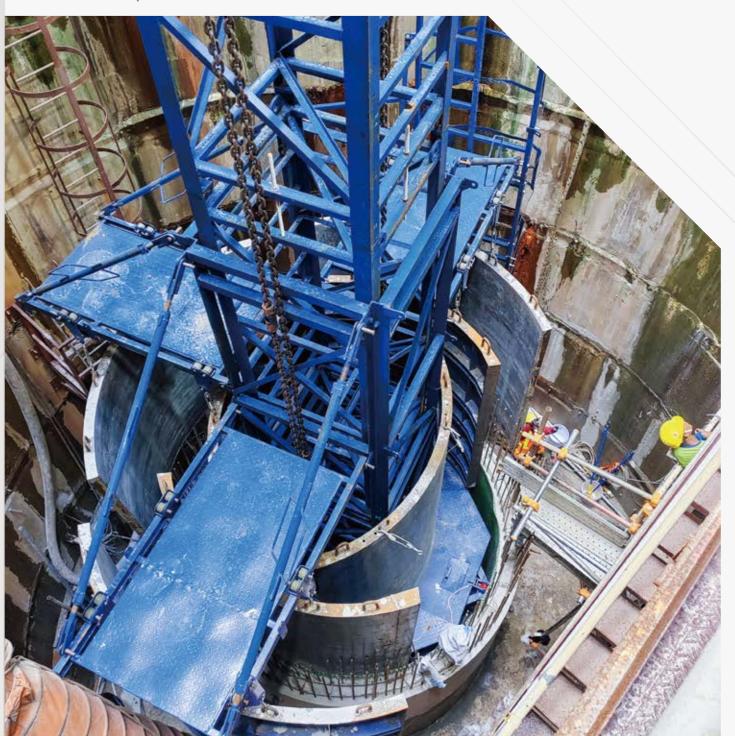

CONTENTS _{目录}



01	Bridge Solutions	03
	桥梁解决方案	
	Temporary Road ····································	04
	Pile Cap	05
	Pier	06
	Bent Cap ····· 盖梁施工	07
	Girder ······ 桥梁施工	08
1	Precast ····································	10
02	Tunnel Solutions	11
	隧道解决方案	
	Arched Tunnel · 拱形隧道	12
	Box Tunnel ······ 箱型隧道	12
	Circle Tunnel ···································	13
	Prefabricated Tunnel Components ······ 隧道预制构件	13
03	Hydraulic Engineering Solutions	14
	水利解决方案	
	Climbing Formwork for Dam · · · · · · · · · · · · · · · · · · ·	15
	Slip Formwork for Shaft 	15
	Climbing Formwork for Shaft · ^{竖井爬模}	15
04	Service	16
	昭冬	





Temporary Steel Bridge 钢栈桥

Using steel pipe piles, beret beams, I-beams, bridge deck plates and protection components, the construction access is quickly built on rivers and beaches.

使用钢管柱、贝雷梁、工字钢、桥面板及防护组件,在河流、滩涂上快速搭建施工通道。








Pile Cap 承台施工

Steel Cofferdam 钢围堰

We provide prefabricated steel cofferdam, which can be shipped in containers and can be easily disassembled.

我们可以提供模块化装配式钢 围堰,以便拆散装进集装箱运抵 施工现场。

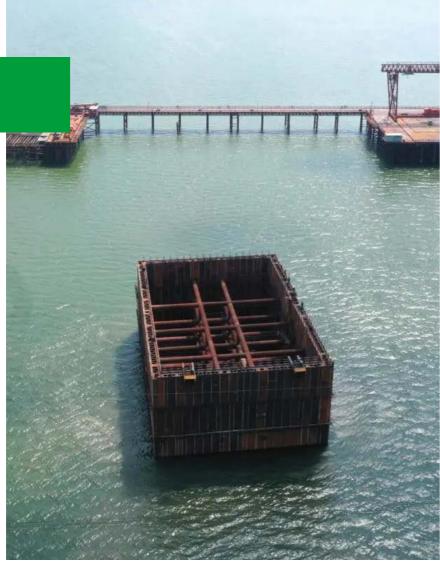



Bottomless Steel Box Cofferdam 无底钢套箱

Suitable for low pile cap and the cofferdam is inserted directly into the bottom of the riverbed.

适用于低桩承台,围堰直接插入河床底部。



Steel Box Cofferdam with Bottom 有底钢套箱

Suitable for high pile cap and the cofferdam is hanged on the pile foundation.

适用于高桩承台,围堰悬挂在桩基上。



Pier 墩柱施工

We can provide all kinds of formwork for pier construction, including steel formwork and climbing formwork.

对于墩柱施工,我们可以提供各类墩柱施工的模板,包括钢模板以及爬升模板。





Steel Formwork for Pier 墩柱钢模板

Suitable for low height pier and lifting equipment can be used.

适用于高度较低,可以使用吊装设备的墩柱。



Climbing Formwork for Pier 墩柱爬模

Suitable for high height piers. 适用于高度较高的墩柱。

Bent Cap 盖梁施工

We can provide steel formwork and operation platform for bent cap constrcution.

对于盖梁施工,我们可以提供盖梁钢模板以及盖梁施工操作平台。



Steel Formwork for Bent Cap 盖梁钢模板

Operation Platform for Bent Cap 盖梁施工平台

The modular operation platform can be lifted and installed and dismantled as a whole after the assembly is completed.

模块化的操作平台,组装完成后可整体的吊装安装和拆除,便于周转。





Bolt Clamp 抱箍

It can be used on circular pier to support the bent cap.

抱箍可以用在圆形墩柱上,作为盖梁的支撑。



Simple Supported Beam(CIS) 简支梁施工(现浇)



Ringlock Scaffold 盘扣支架

Suitable for relatively flat terrain with a certain bearing capacity of the foundation.

适用于较平坦场地,地基有一定的承载力。



Beret Beam Support 贝雷梁支架

Suitable for bridges crossing roads, rivers where the support needs reserve passage holes.

适用于跨越道路、河流等情况的桥梁,支架需要预留通行孔。

07/08

Suspended Beam 悬臂梁



Heavy Duty Bracket 重型悬臂托架

Used for 0# segment of suspended beam. 用于悬臂梁0#节段现浇施工。



Balanced Cantilever Carriage 挂篮

Used for cantilever segment construction.
用于悬臂节段施工。

Arch Bridge 拱桥





Cantilever Carriage for Arch Bridge 拱桥挂篮

Used for reinforced concrete arch construction.
用于钢筋混凝土拱圈施工。



Precast 预制模具

We can provide precast molds for prefabricated bridge components, including prefabricated pier, prefabricated bent cap, prefabricated box girders, prefabricated U-shaped girders, prefabricated T-beams, and prefabricated segmental assembly beams.

我们可以提供桥梁施工需要用到的预制模具,包含预制墩柱、预制盖梁、预制箱梁、预制U型梁、预制T梁、预制节段拼装梁。

Prefabricated Bridge Components 桥梁预制构件



Prefabricated Pier 预制墩柱



Prefabricated Bent Cap 预制盖梁



Prefabricated Box Girder (Hydraulic) 预制箱梁(液压)



Prefabricated Box Girder 预制箱梁



Prefabricated T-beam 预制T梁



Prefabricated U-beam 预制U梁



Prefabricated Segmental Assembly Beams 预制节段拼装箱梁

09/10





Arched Tunnel 拱形隧道







Timber Formwork Tunnel Trolley 木模体系隧道台车

Box Tunnel 箱型隧道



Steel Formwork Pipe Gallary Tunnel Trolley 钢模体系管廊台车



Timber Formwork Pipe Gallary Tunnel Trolley 木模体系台车



GETO®

Circle Tunnel 圆形隧道







Circle Tunnel Needle Beam Trolley 圆形隧道针梁式台车


Prefabricated Tunnel Components 隧道预制构件



Prefabricated Tunnel Segment Mold 预制管片模具



Prefabricated Box Tunnel Mold 预制箱型隧道模具

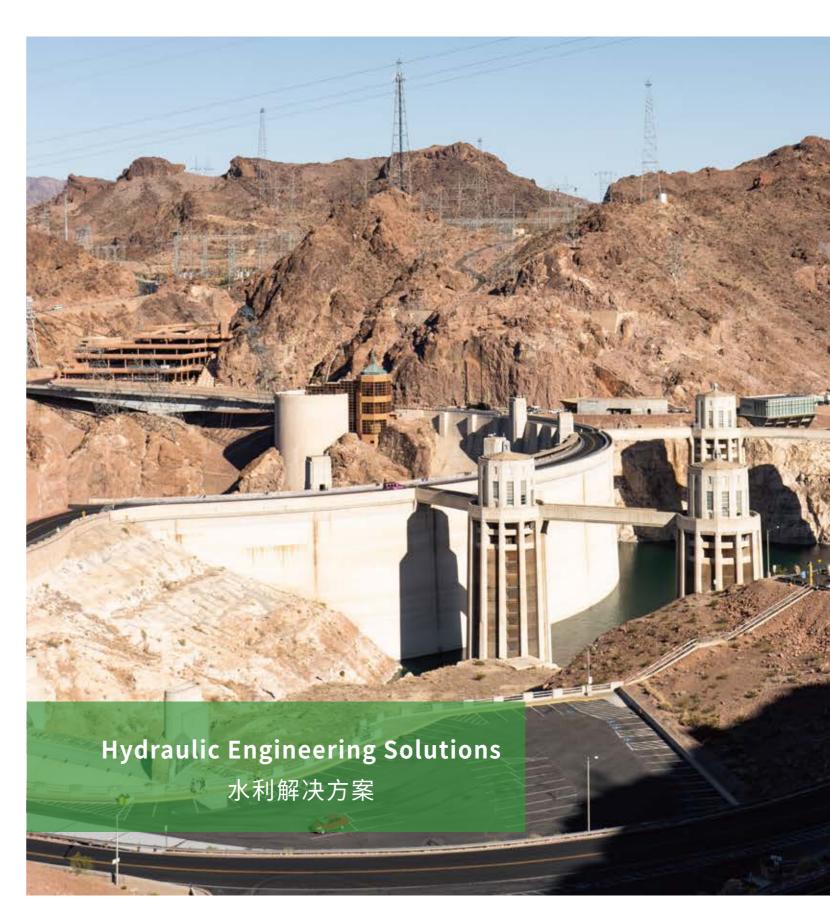

Single-side Support Climbing Formwork for Dam 单侧支撑大坝爬模

It can withstand concrete pressure on one side.

可承受一侧的混凝土压力。


Slip Formwork for Shaft 竖井滑模





Climbing Formwork for Shaft 竖井爬模





Service 服务



We provide consulting services for you before bidding and during the project process.

我们在投标前和项目过程中为您提供咨询服务。






We provide services for scheme design and computational analysis, including PE calculation.

我们提供方案设计和计算分析的服务,包括PE专业工程师计算。





我们可以及时和安全地将货物送到项目地点。



We can arrange experienced technical personnel worldwide to solve problems on-site.

我们可以在全球范围内安排经验丰富的技术人员到现场解决问题。

Hydraulic Engineering Solutions Tunnel Solutions Bridge Solutions

15/16